


3 2 1 0 1 2 3 4 5 6 7 8 9 10 m

The Z20E's CTEs most popular machine, featuring the renowned sigma/2-stage-telescopic boom. Enabling maximum outreach from 2m working vertically or horizontally or in any combination is easy with the Z20E. Offering almost 20m working height and up to 9.5m up and over outreach with zero tailswing, the Z20E is the most versatile platform in its class. The Z20E shares the proven 'Z' control system and features: simple proportional controls, basket load sensing, load sensitive outrigger interlocks and zero tailswing.

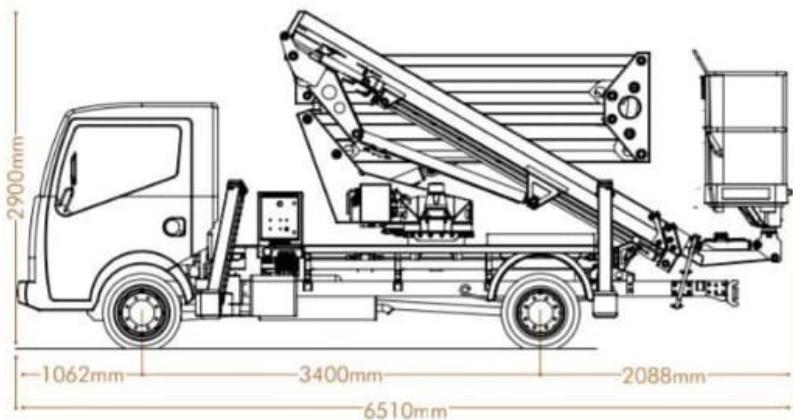

Z20E

3.5tonne GVW Cat. B

SPECIFICATIONS

Operating Dimensions

Working Height	19.8m
Platform Height	17.8m
Outreach from Centre	9.5m
Outrigger Footprint	(WxL) 2.8m x 3.5m
Rotation	360° Continuous
Basket Rotation	80° + 80°
Safe Working Load	200Kg
Dimensions	1.4mx0.7mx1.1m(H)


Closed Dimensions (transit)

Length	6.51m
Width (Nissan)	2.3m
Height	2.9m
GVW 3500Kg	(Nissan Cabstar)

Can be specified on 3.5tonne GVW chassis and upwards.

Nissan Cabstar is standard, can be mounted on Iveco, Mercedes, Renault.

Can be specified with 230Kg Z2'OE5' Model.

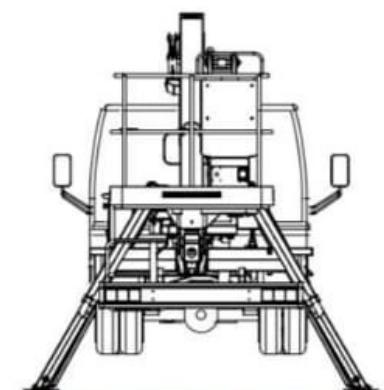

Front: Min. 2530mm Max. 2700mm
Back: Min. 2620mm Max. 2800mm