



**Jinwoo450 Work Area Diagram
when mounted on 4x2 Daewoo vehicle**

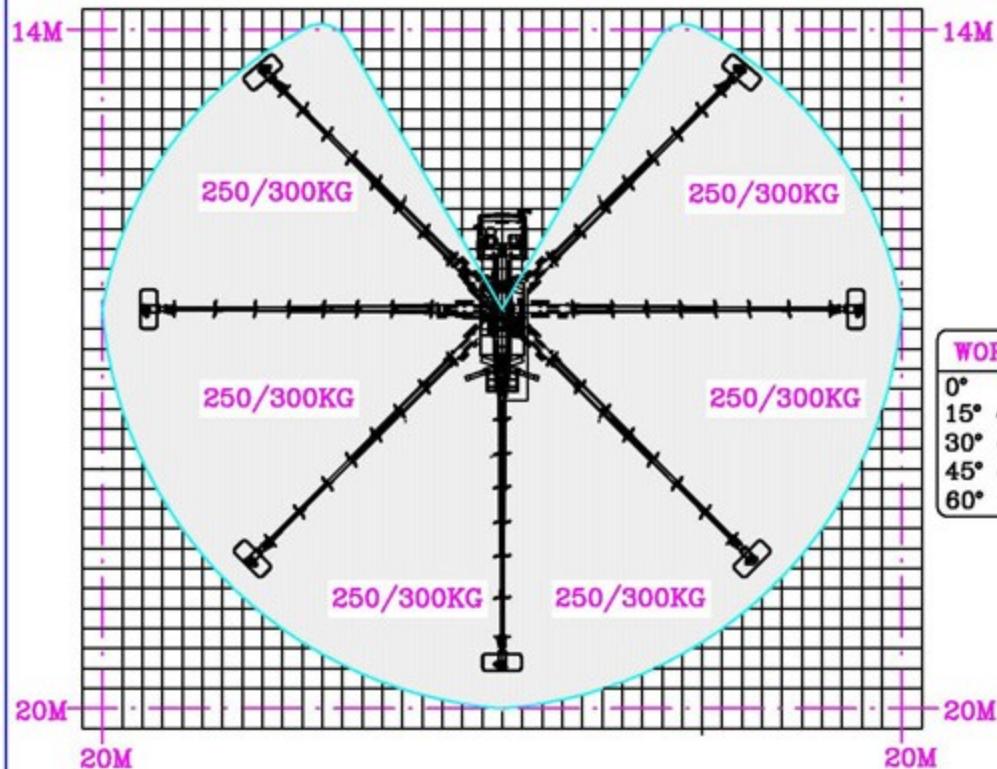

NOTE:

- * Final delivery Product might vary slightly upon Assembly and Mounting onto vehicle.
- * 250Kg Max. loading into FRP Basket while 300Kg is max. payload in Steel Platform.
- * **FRP Basket not suitable** for working with LIVE High-Tension Voltage Wires.
Insulation is for operators within Basket only.
- * **MUST WORK AT LEAST 5M AWAY FROM HIGH TENSION ELECTRICITY WIRES.**
- * All Dim. are in Metres unless specified.

Platform Rotation:
360° Continuous is both directions

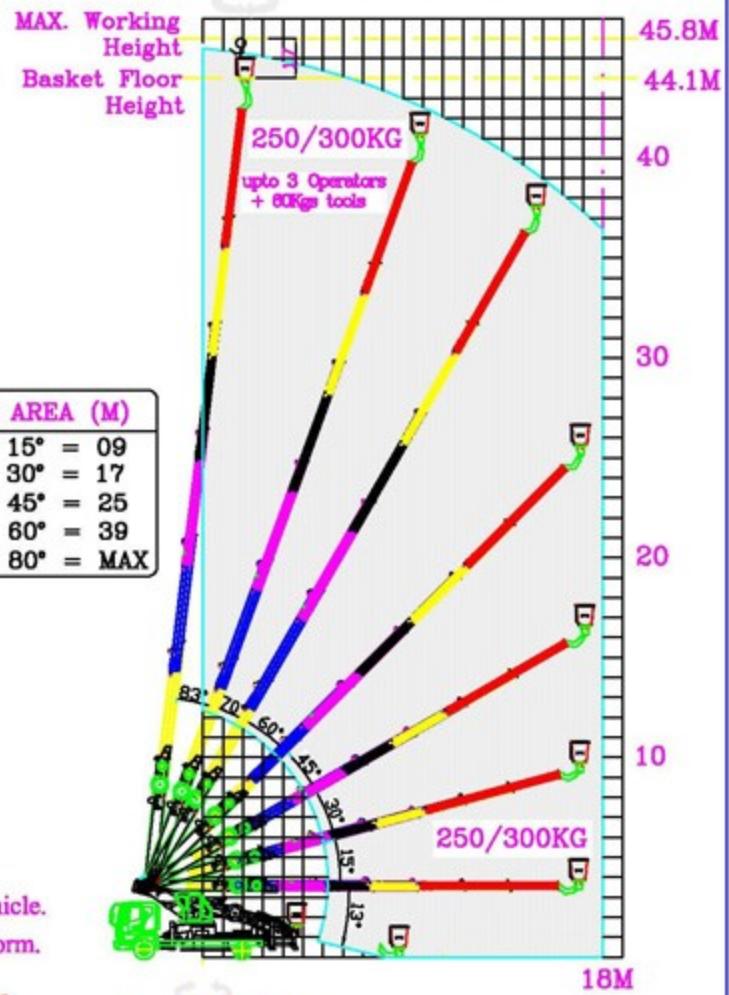

Turret Rotation:
Std.: 340°($\pm 170^\circ$) Non-Continuous with Auto Cut-off Sensors)
Optional: 360° Continuous in both directions